☒ **Attachment for Inquiry/ Order**

Reference: _____

Contact:

ADAPTION TO CAR / MODIFICATION MOUNTING HOLES

Outer Housing
(without modification)

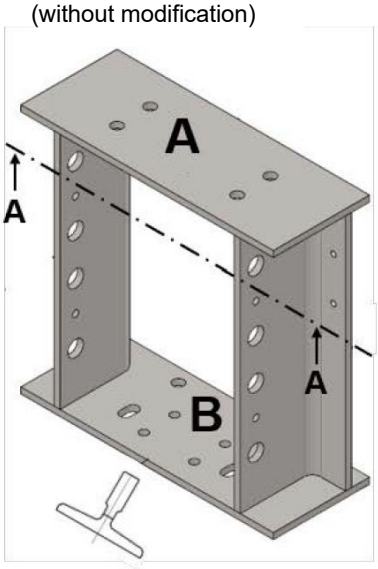

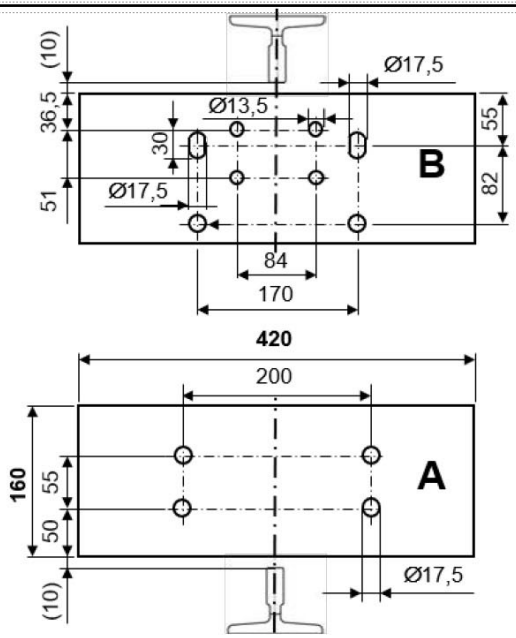

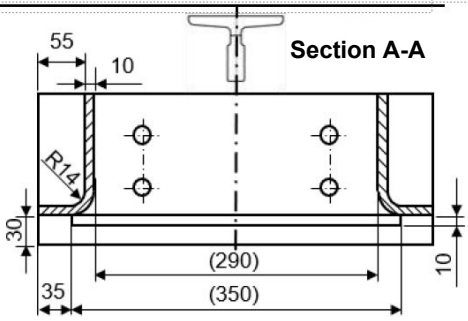

50.100.225 **Reinforced housing**
245mm high
107.060.131 **Tandem-housing**
415mm high

Does not apply to the standard attachment of the basic housing (107.060.046/047)

Projection Method 1

A Modification of the Headplate (mounting side)

NOTE:

When determining the mounting holes for the head and bottom plates, note the position of the side parts (see section A-A)

ALTERNATIVE:

→Adapter plates

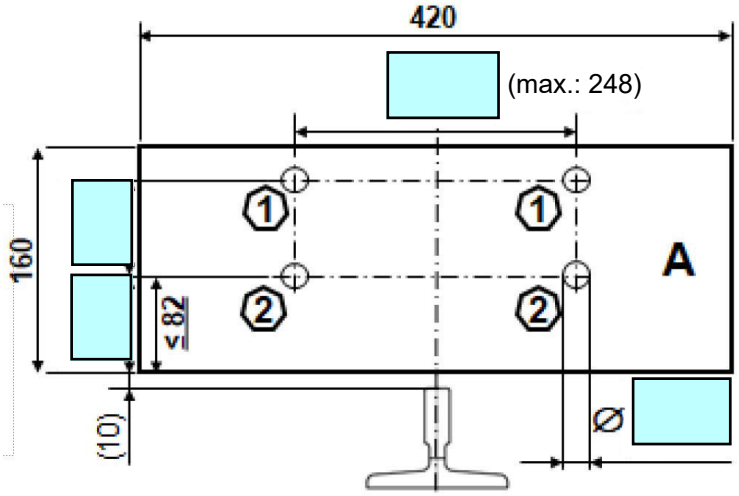

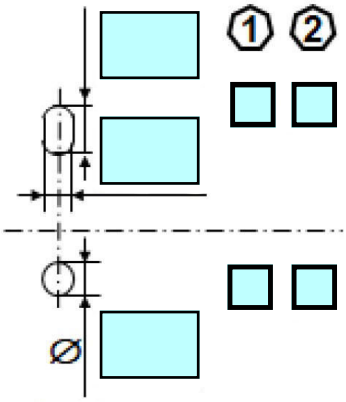

Note:
- at least 4 boreholes
- at least 4 x M12 12.9

B Modification of the Bottomplate

Selection:

- 2 or 4 holes
- round hole or elongated hole
- Diameter or Lenght/Width
- Positioning

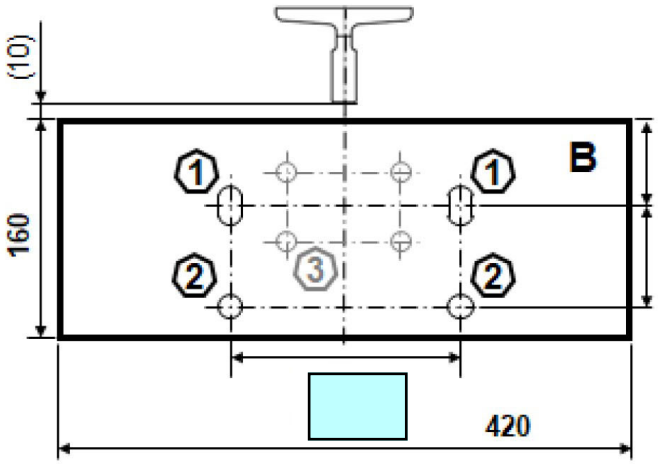

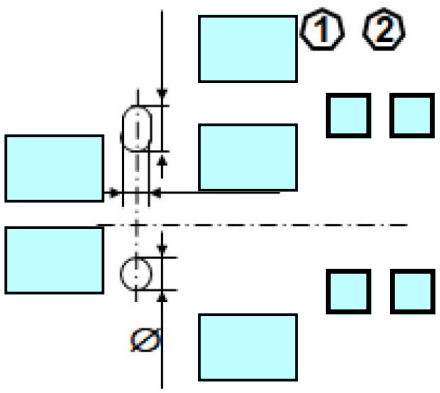

3 Elimination mounting hole for pattern guide shoes